

Standard Features

- GPS L1-L5, GLONASS, Galileo splitter
- Low Insertion Loss (0.4dB avg)
- High Port-to-Port Isolation (30dB avg)
- Excellent VSWR (1.10:1 avg)
- 15 VDC & 75 mA max on DC block port
- Tri-Alloy SMA Female (Jack) 50 Ohms




Specifications

- Frequency Range: 1000 - 2000 MHz
- Insertion Loss above 6.02 dB: 0.6 dB max
- Amplitude Balance: 0.3 dB max
- Phase Balance: 3° max
- Isolation: 22 dB min
- Input VSWR: 1.30:1 max
- Output VSWR: 1.20:1 max

2 WAY POWER DIVIDER RF INPUT RATINGS

Into Matched Load VSWR's	In-Phase	180° Out-of-Phase
1.2 : 1	20 Watts	20 Watts
2.0 : 1	20 Watts	10 Watts
	10 Watts	1 Watts

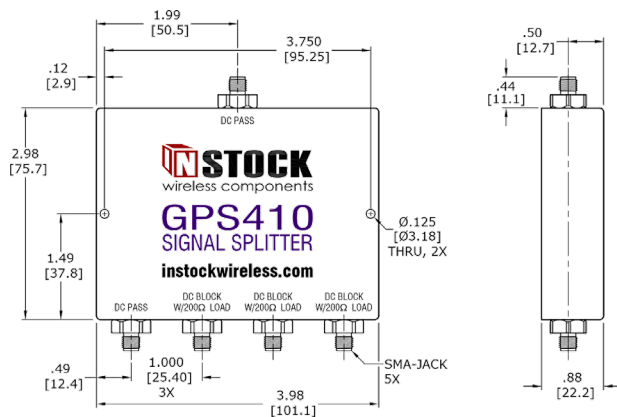

Mechanical

CIRCUIT DESIGN

- Wilkinson; 1 DC pass, 3 DC block w/ 200Ω internal load

CONNECTORS

- SMA Female, 50 Ohm Coaxial

CONNECTOR BODY

- Brass, Tri-Alloy Plate

CONNECTOR PIN

- Beryllium Copper, Gold Plate

CONNECTOR INSULATOR

- PTFE, Virgin Electrical Grade

OPERATING PARAMETERS

- -65° C to +85° C

PHYSICAL

- Aluminum, Clear Chem Film
- Weight: 383 grams

2 WAY POWER COMBINER RF INPUT RATINGS

Input Signals	In-Phase	180° Out-of-Phase
Coherent	4 x 5 Watts	4 x 0.25 Watts
Non-Coherent	4 x 0.5 Watts	

5-YEAR LIMITED PARTS & LABOR WARRANTY **MADE IN THE USA**

US/CAN: (800) 940-2248 INTL: +1 (636) 724-3666 sales@masterclock.com

Masterclock.com