




FEATURES

- 6" (150mm) and 10" (250mm) models available
- Vibrating type bell for general purpose signaling
- Low power consumption and high decibel rating
- Use with Masterclock CRL1000 Bell Ringer Controller
- Mounts on standard 4" square (101mm) electrical box
- Indoor or outdoor use, -40° to 150°F (-40° to 66°C)
(NOTE: outdoor use requires weatherproof mounting electrical box)
- UL Listed
- 4 wire termination – 18 AWG stranded
- Red powdercoat finish

Model	Size Inches (mm)	Input Voltage	Input Current (Amps Max)	Typical dB @ 10' (3m)	Minimum dB @ 10' (3m)
BI24-6	6 (150)	24 VAC	0.170	91	78
BI24-10	10 (250)	24 VAC	0.170	94	78

Installation

1. Remove the gong
2. Connect wiring (see diagram)
3. Mount bell mechanism to mounting box with striker pointing down.
4. Reinstall the gong, ensuring that the positioning pin is in the hole of the gong.
5. Test for proper operation

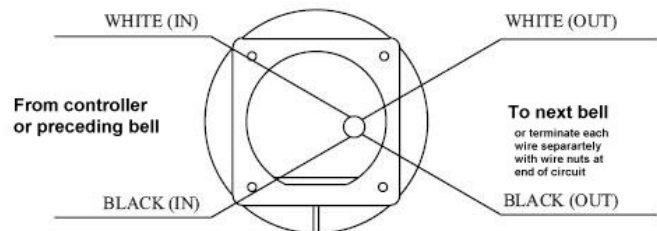

(NOTE: failure to install with striker down will prevent the bell from operating)

