


FEATURES

- Reads and converts from/to: SMPTE, EBU, IRIG-B
- Automatic daylight saving time adjustments
- -11.5 to +12 hour selectable time zone offsets
- Time mark pulse output (ttl level) at 1 per: sec, min, hour or day
- Dry contact closure at 1 per: minute, hour or day



Rack mountable with RM4

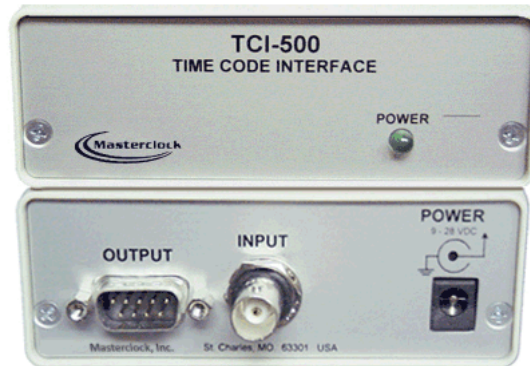

SPECIFICATIONS

Supported Time Codes

- > SMPTE (30fps, 25fps, and 24 fps) - non-drop frame only
- > IRIG-B (B0, unmodulated/pulse width modulated/dc level shift)
- > IRIG-B (B1, 1kHz Amplitude Modulated)

Power

- > Input voltage: 12 VDC
- > Input power connector: 2 mm male jack
- > Includes wall-mount 24 VDC power supply - UL and CE listed
- > Power consumption: < 2W

Compliance

- > FCC, ROHS, CE Marked, ANSI

Physical

- > Size: 1.5 x 4.1 x 5.5 in (3.8 x 10.4 x 14 cm)
- > Weight: 17 oz. (480 g)

Operating Parameters

- > Temperature: 0 to 60°C
- > Humidity: Up to 90% (non-condensing)

MASTERCLOCK, INC.

5-YEAR LIMITED PARTS & LABOR WARRANTY

MADE IN THE USA

phone (USA and Canada):
1-800-940-2248

phone (international):
+1-636-724-3666

email:
sales@masterclock.com

online:
www.masterclock.com